

### **Introduction**

The Burda-TS 4kW is part of a family of controllers designed to provide energy saving when used with Quartz Infrared Halogen Lamps or other Heating and Lighting Products. The 'T' model switches the lamps on for a pre-determined time period of between 1 and 60 minutes.

The microcontroller-based unit incorporates zero-voltage switching and a soft-start function to eliminate the lamps' initial high inrush current – potentially increasing lamp life by as much as 30%. Installation of the unit is simple and once installed is relatively maintenance-free.

**Applications:** patio areas, smoking shelters, restaurants, warehouses, workshops and garden lighting.

### **Installation**

**Important:** Read carefully the following information before installing the unit. The unit should be fixed securely using the four mounting holes accessible from the front of the unit. Remove the lid to access the mounting holes. To ease installation, a mounting template is provided on the next page to locate the 4 mounting hole centres.

**IMPORTANT! The unit must be orientated with the cable glands facing down.**

### **Wiring**

It is recommended that installation and maintenance of this equipment should be done with reference to the current edition of the I.E.E. wiring regulations (BS7671) by suitably qualified/trained personnel. These regulations contain important requirements regarding safety of electrical equipment (for International Standards refer to I.E.C/ directive IEC950).


**Warning! Isolate the mains supply before commencing any work on this unit. Ensure all earth wires are connected to maintain earth continuity to the lamp fittings.**

The unit is fitted with two cable glands. Only one cable should be fitted per gland to prevent degrading the unit's IP rating. When fitting two loads, refer to 'Wiring Diagram' for an alternative wiring configuration using a junction box.

The mains supply connects to the terminal block marked '**LINE**'. Connect the supply **LIVE** to the '**L**' terminal, **NEUTRAL** to the '**N**' terminal and **EARTH** to the '**E**' terminal.

The load connects to the terminal block marked '**LOAD**'. Connect the load **LIVE** to the '**L**' terminal, **NEUTRAL** to the '**N**' terminal and **EARTH** to the '**E**' terminal. If two lamps are to be fitted they must be wired in parallel.

### **Mounting Template**

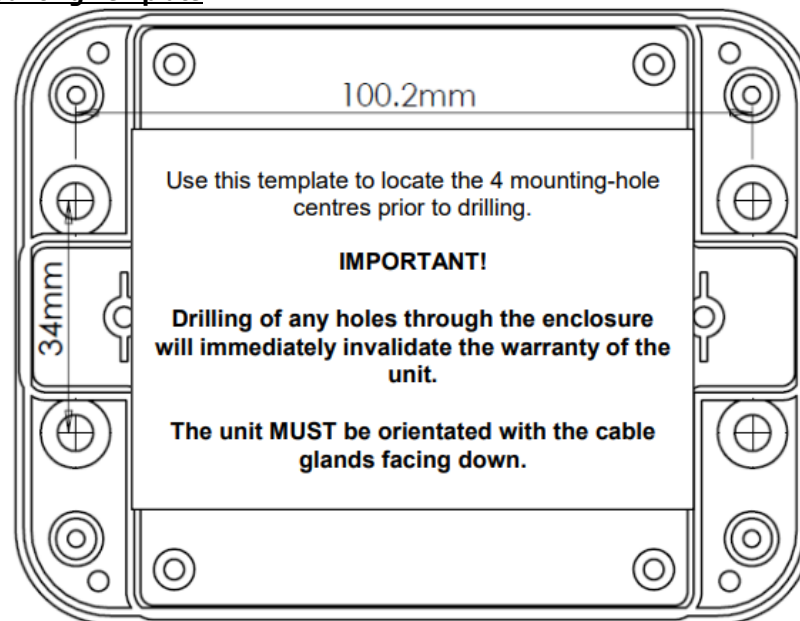

### **Commissioning**

Set the on-time preset (VR1) to a time period of between 1 and 60 minutes. VR1 is located at the top of the printed circuit board as shown in the Wiring Diagram. Replace the lid and switch on the mains supply to the unit. To turn the load on touch the centre of the switch symbol on the front panel. To turn the load off touch the switch symbol on the front panel again. When the load is on, it will switch off automatically, after the time which has been set on VR1, has expired.

### **Technical Specification**


Supply Voltage	230VAC +/- 10% 50/60 Hz
Switching Capacity	4kW Max.
Lamp On-Time	1 to 60 minutes (VR1 Preset)
Current Consumption (control circuit)	50mA
Terminals	2.5mm <sup>2</sup> Rising Clamp
Operating Temperature	-20 to 40°C
Protection Rating	IP65
Gland Diameter	Max Cable Entry 2.5mm <sup>2</sup>
Enclosure Dimensions (WxLxH)	120x90x50mm



Not for general waste

**RoHS**  
COMPLIANT

## Wiring Diagram

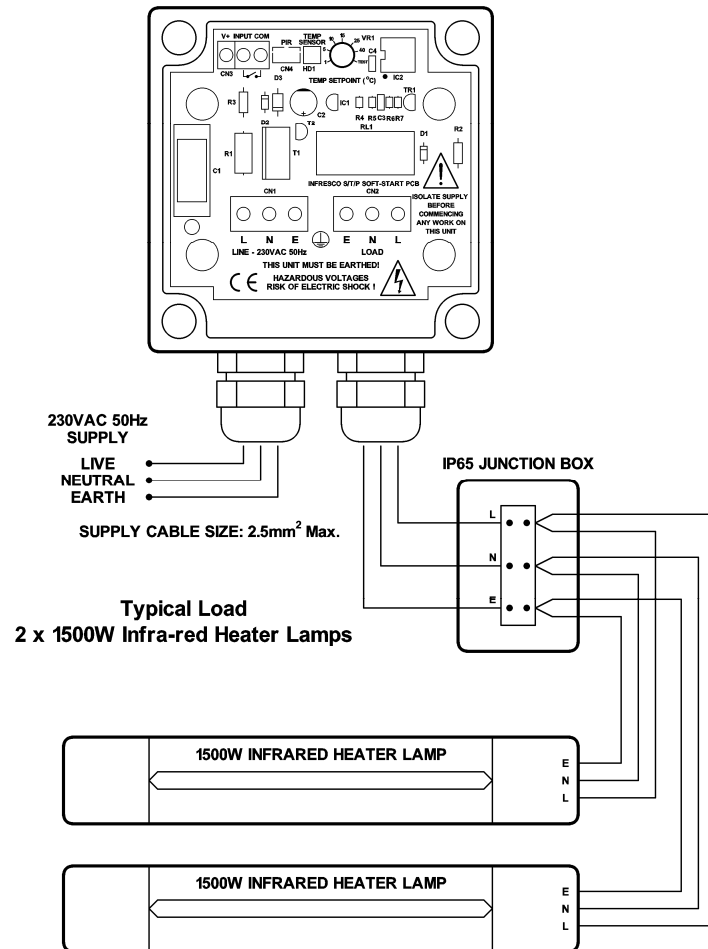

## TS4 (Touchpad) USERS & INSTALLATION MANUAL



Subject to errors and technical changes



Burda Worldwide Technologies GmbH – Rudolf-Diesel Straße 18 – D-65760 Eschborn  
T: +49 6173 324240 - F: +49 6173 3242424 – Mail: [info@burdawtg.de](mailto:info@burdawtg.de) – [www.burdawtg.com](http://www.burdawtg.com)